


Wonderlee Automatic slide gate specialist

Slide gate ... on track ... disguised as ordinary



With ground track but no hanging track, the slide gate is driven by electrically operated opener for safe and secure remote control access. Nylon teeth rack from Hi-Motions Italy greatly reduce noise. High-tensile I-rail with Wonderlee patented aluminium cap further reduce noise level. Compliant to EMSD code of practice and BD PNAP-APP 146. Optional mobile phone control system and wireless intercom.

Specification					
Opener	Travel Speed	0.2m/sec	Gate Design	Max opening	12 meter
	Voltage in	220 volt		Max weight	2,000 Kg
	IP rating	44		Gate length	14.5 m
	Fail-safe	Yes		Gate thickness	100mm
	Remote control	Yes		I-rail	aluminum cap

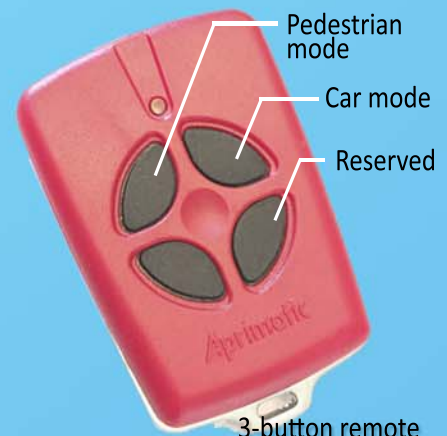

3-button remote